

Order Code : L0050078.CL.40
Product Code : COVE.2500.CL40


Features

Body : Alumium
IP Grade : IP44
Installation : Recessed Mounted
Lighting Source : Mid Power LED

Performance Data

Power : 30 W
Flux : 2661lm
Efficiency : 90 lm/W
Voltage : 220-240 V AC
Frequency : 50-60 Hz
Power Factor : > 0,9
CCT (K) : 4000 K
CRI : > 80

Photometric Curve

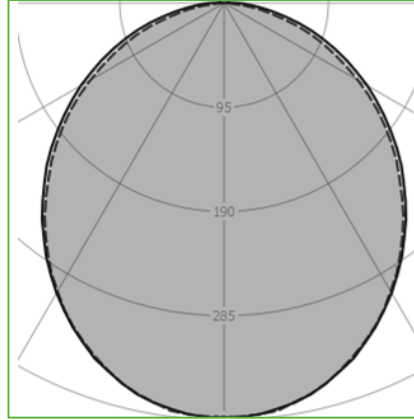

COVE.2500.CL.40




Light Continuty



Mounting Kits



Dimensions

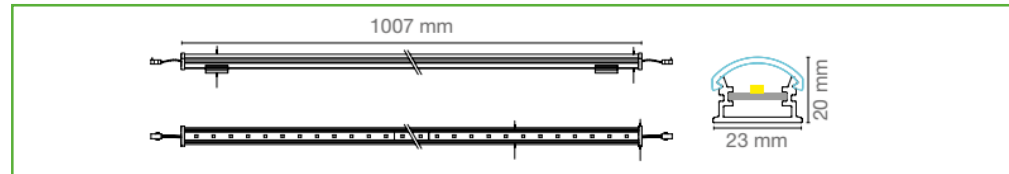

siberled

www.siberled.com

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye
T: +903123517686 siber@siberled.com



SELV

