

Order Code : L0050035.30.80N  
Product Code : HIGHSPOT-15.30.80.N


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 803 lm  
Efficiency : 61 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 3000 K  
CRI : > 80

## Photometric Curve

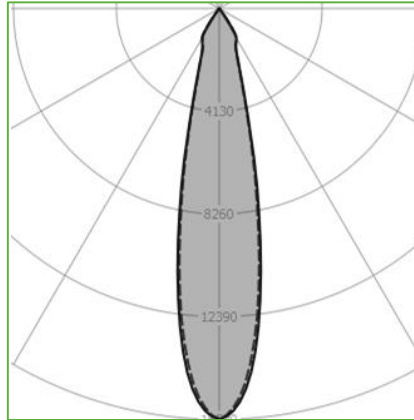

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com


## HIGHSPOT-15.30.80N



## Color Options



## Dimensions

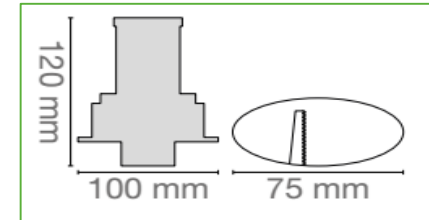

Order Code : L0050035.30.80M  
Product Code : HIGHSPOT-15.30.80.M


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 803 lm  
Efficiency : 61 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 3000 K  
CRI : > 80

## Photometric Curve

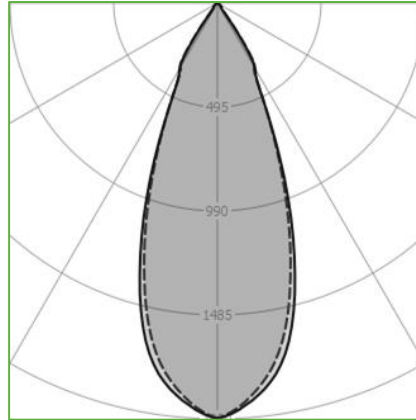

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com


## HIGHSPOT-15.30.80M



## Color Options



## Dimensions

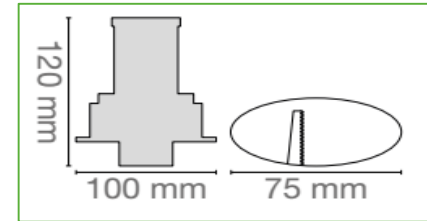

Order Code : L0050035.30.80W  
Product Code : HIGHSPOT-15.30.80.W


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 803 lm  
Efficiency : 61 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 3000 K  
CRI : > 80

## Photometric Curve

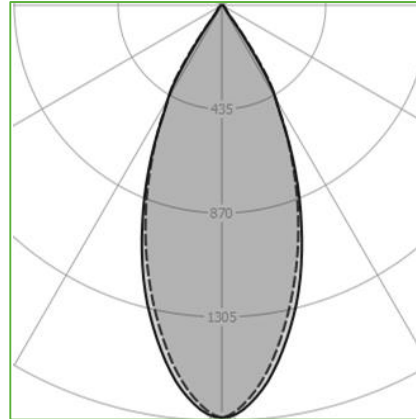

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com


## HIGHSPOT-15.30.80W



## Color Options



## Dimensions

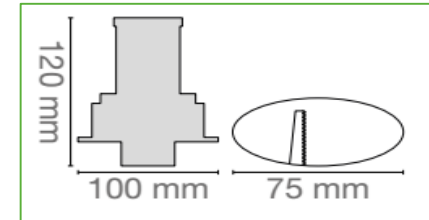

Order Code : L0050035.40.80N  
Product Code : HIGHSPOT-15.40.80.N


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 883 lm  
Efficiency : 67 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 4000 K  
CRI : > 80

## Photometric Curve

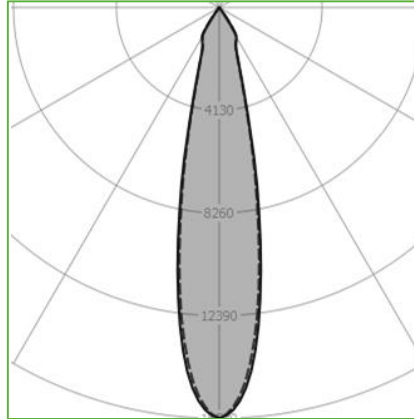

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com


## HIGHSPOT-15.40.80N



## Color Options



## Dimensions

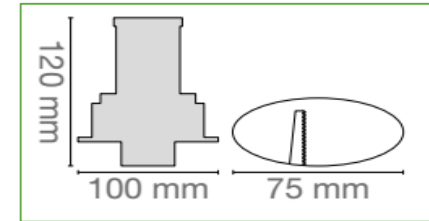

Order Code : L0050035.40.80M  
Product Code : HIGHSPOT-15.40.80.M


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 883 lm  
Efficiency : 67 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 4000 K  
CRI : > 80

## Photometric Curve

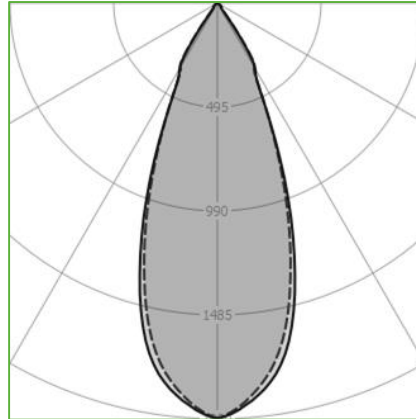

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com


## HIGHSPOT-15.40.80M



## Color Options



## Dimensions

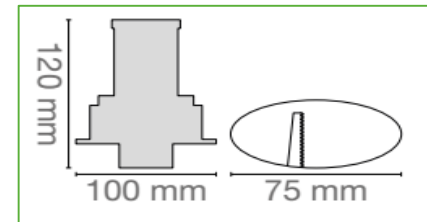

Order Code : L0050035.40.80W  
Product Code : HIGHSPOT-15.40.80.W


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 883 lm  
Efficiency : 67 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 4000 K  
CRI : > 80

## Photometric Curve

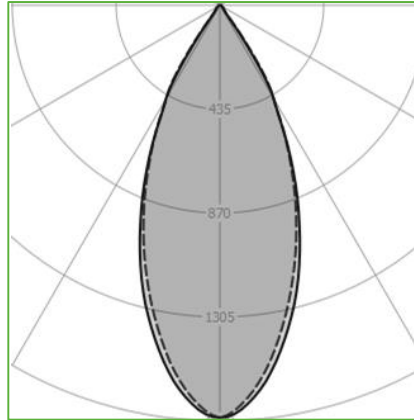

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com


## HIGHSPOT-15.40.80W



## Color Options



## Dimensions

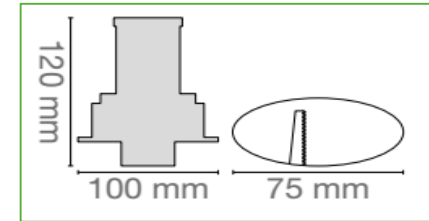

Order Code : L0050035.30.90N  
Product Code : HIGHSPOT-15.30.90.N


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 763 lm  
Efficiency : 58 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 3000 K  
CRI : > 90

## Photometric Curve

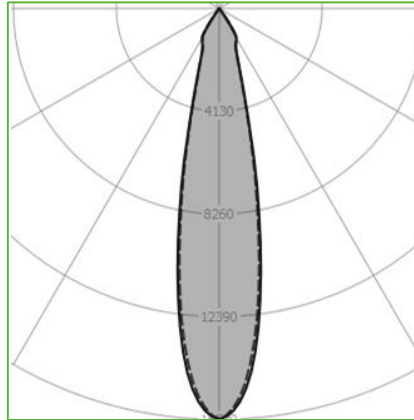

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com


## HIGHSPOT-15.30.90N



## Color Options



## Dimensions

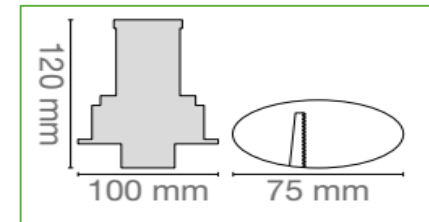

Order Code : L0050035.30.90M  
Product Code : HIGHSPOT-15.30.90.M


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 763 lm  
Efficiency : 58 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 3000 K  
CRI : > 90

## Photometric Curve

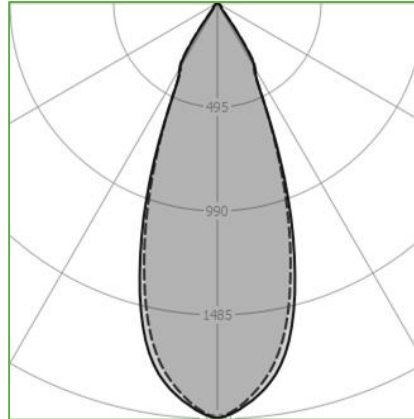

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com


## HIGHSPOT-15.30.90M



## Color Options



## Dimensions

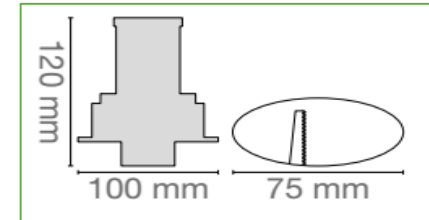



Order Code : L0050035.30.90W  
Product Code : HIGHSPOT-15.30.90.W


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 763 lm  
Efficiency : 58 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 3000 K  
CRI : > 90

## Photometric Curve

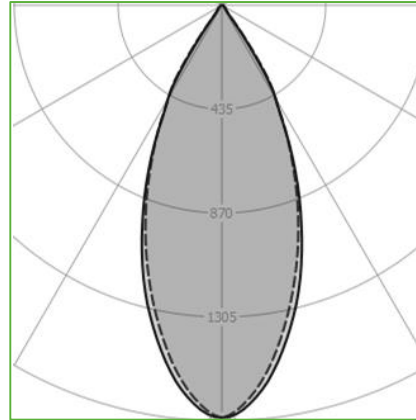

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com


## HIGHSPOT-15.30.90W



## Color Options



## Dimensions

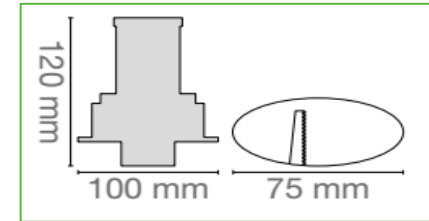

Order Code : L0050035.40.90N  
Product Code : HIGHSPOT-15.40.90.N


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 839 lm  
Efficiency : 64 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 4000 K  
CRI : > 90

## Photometric Curve

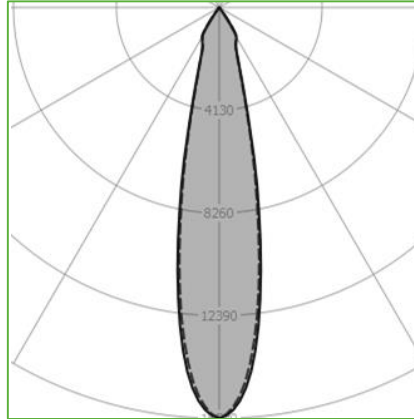

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com


## HIGHSPOT-15.40.90N



## Color Options



## Dimensions

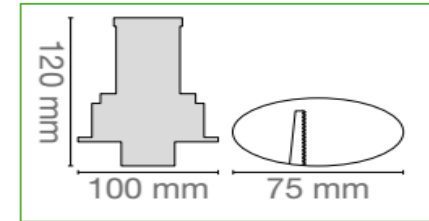

Order Code : L0050035.40.90M  
Product Code : HIGHSPOT-15.40.90.M


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 839 lm  
Efficiency : 64 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 4000 K  
CRI : > 90

## Photometric Curve

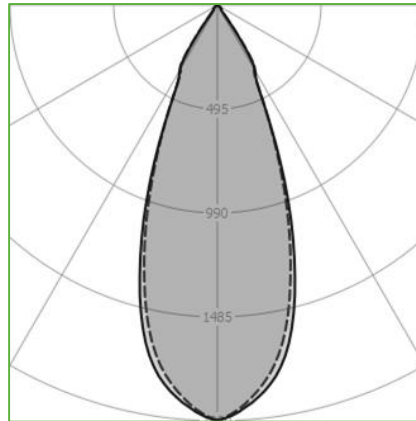

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com


## HIGHSPOT-15.40.90M



## Color Options



## Dimensions

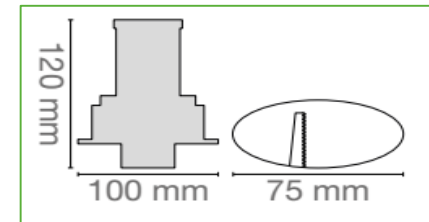

SELV



Order Code : L0050035.40.90W  
Product Code : HIGHSPOT-15.40.90.W


## Features

Color : RAL  
Body : Alumium  
IP Grade : IP44  
Installation : Recessed Mounted  
Lighting Source : Mid Power LED

## Performance Data

Power : 13 W  
Flux : 839 lm  
Efficiency : 64 lm/W  
Voltage : 220-240 V AC  
Frequency : 50-60 Hz  
Power Factor : > 0,9  
CCT (K) : 4000 K  
CRI : > 90

## Photometric Curve

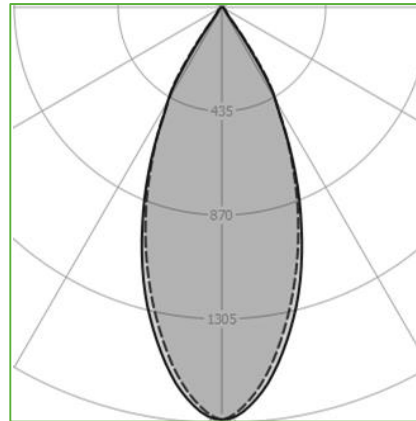

siberled

[www.siberled.com](http://www.siberled.com)

İstanbul Yolu 26. Km Susuz mah. Yenimahalle / Ankara / Türkiye  
T: +903123517686 siber@siberled.com

## HIGHSPOT-15.40.90W



## Color Options



## Dimensions

